

Seicane S128002W 2003-2013 VW Volkswagen Scirocco Passat CC aftermarket car radio upgrade installation replacement instruction

Seicane S128002W 2003-2013 VW Volkswagen Scirocco Passat CC head unit after installation



Please Note:

This unit can be suitable for the following cars which are also with the same installation steps as follows.

2008-2013 VW Volkswagen Scirocco Passat CC Golf 6 Passat CC Golf 6

2004-2011 VW Volkswagen Sagitar PASSAT

2003-2013 VW Volkswagen Golf 5 Caddy Touran

2010-2013 VW Volkswagen POLO Multivan

2009 2010 2011 VW Volkswagen Passat B6

2005-2013 VW Volkswagen Jetta SAGITR

2006-2011 Seat Cupra

2010-2013 VW Volkswagen Sharan

2005-2011 VW Volkswagen Transporter

2006-2012 VW Volkswagen Magotan

2011 2012 VW Volkswagen Lavida

2003-2009 VW Volkswagen Golf Plus

2009-2013 VW Volkswagen BORA Polo V 6R

2005-2012 VW Volkswagen Passat

2006-2013 VW Volkswagen EOS
2011 2012 2013 VW Volkswagen New Beetle 2
2009-2013 Skoda Yeti
2003-2010 Skoda Roomster
2004-2013 Skoda FABIA
2006-2013 Skoda Praktik
2010-2013 Skoda Superb
2012 2013 Skoda Rapid
2004-2013 Seat Altea Toledo
2005-2011 Seat Leon
2010 2011 Seat Alhambra

Here are some tips about the installation:

1. Please disconnect the power before the installation.
2. Please prepare a lever and a screwdriver before the removal and the installation.
3. Please keep all the separate parts from the car. Please take great care of the dashboard to avoid scratching it during its detachment and installation. Please keep handy any parts from the car and make use of all the original screws from the car as much as possible. so each related part of the unit can be fixed securely.
4. For your convenience, here's the recommended tools for removal and installation from Seicane, please check for more details: <http://www.seicane.com/car-dvd-dismantling-device-srd-400>

2003-2013 VW Volkswagen Scirocco Passat CC head unit installation guide

1. Remove the top panel with a lever.



2. Disconnect the connector at the back of the panel.



3. Unscrew the screw with a screwdriver.



4. Remove the metal sheet on the top with your hands.



5. Unscrew two screws circled in red shown as follows under the metal sheet.



6. Remove the air conditioner vent with your hands.



7. Unscrew two screws under the vent with a screwdriver.



8. Remove the panel on the original car radio.



9. Unscrew four screws holding the original car radio with a screwdriver.



10. Take the original car radio out of the dash.




11. Disconnect all the connectors at the back of the original car radio.



12. Check all the accessories for the new Seicane head unit.



13. Connect the harnesses to the back of the new Seicane head unit.

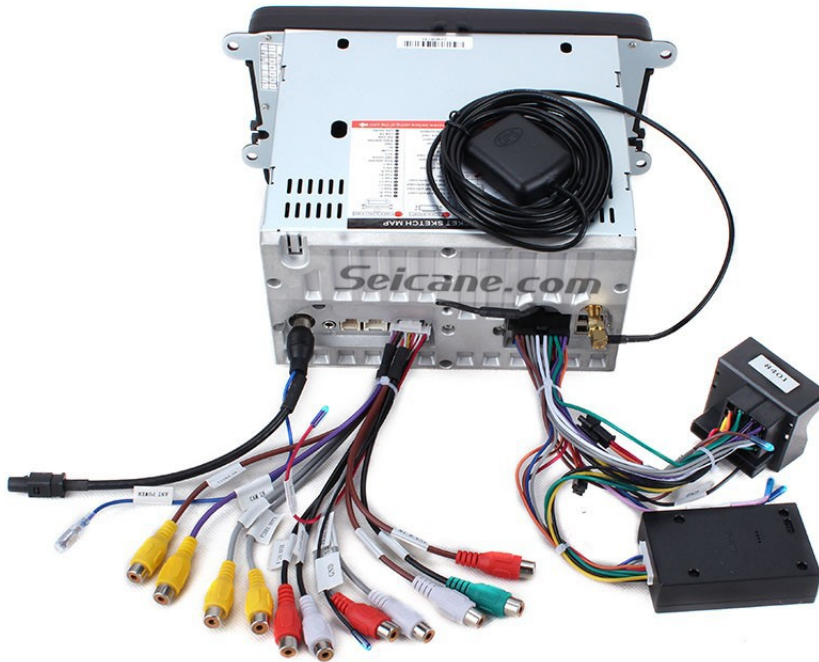

14. Connect the Seicane head unit to your original car radio 's plugs.

15. Turn on the new Seicane head unit to have a careful check if everything works well. If it doesn't, please check whether all the cables are connected correctly.

16. Put the new Seicane head unit into the dash.

17. Put everything into their original place.

Please note:

We suggest you arrange a professional to install it. If you have any questions about installation, please send us photos about your original car's plugs, we can make a wiring diagram for your car.