

---

## Seicane S085996 2000-2011 Mercedes SLK Class R171 SLK200 SLK280 SLK300 SLK350 SLK55 aftermarket car stereo upgrade installation replacement instruction

Seicane S085996 2000-2011 Mercedes SLK Class R171 SLK200 SLK280 SLK300 SLK350 SLK55 car radio after installation



### Before and during installation, you should notice:

1. Before connecting, please make sure the ignition is off to avoid short circuit.
2. Ensure connect the yellow and red power cable at last.
3. Ensure that all loose wires are isolated with electrical tape
4. Ensure don't tangle the wire when tighten the moving parts(Such as seat rails).
5. Ensure that all ground is connected to the same place.
6. Using the improper fuse may cause damage of fire, so when replace the fuse, please consult the professional.
7. For your convenience, here's the recommended tools for removal and installation from Seicane, please check for more details: <http://www.seicane.com/car-dvd-dismantling-device-srd-400>

## 2000-2011 Mercedes SLK Class car radio installation guide

1. Open the little box beneath the radio and remove the screws with a screwdriver.



2. Pry the trim panel on the right side of the box with a removal tool, after that, remove it.



3. Remove the screw with a screwdriver.




4. Pry the leather surrounding the brake, then pull it up, at last, remove it.



5. Remove the trim panel under the brake with your hands.



6. Disconnect the connectors behind the trim.

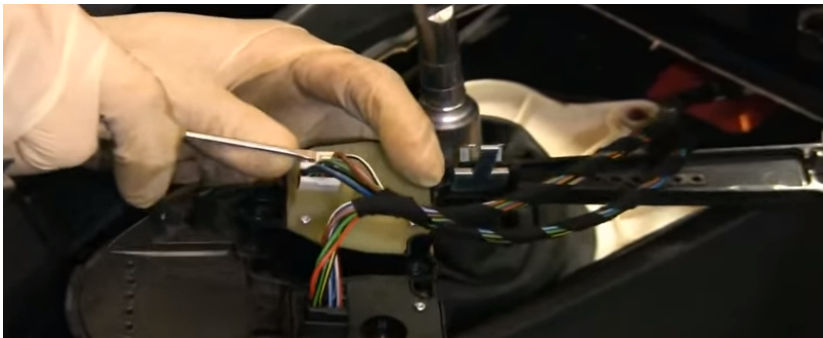

7. Take the box out of the dashboard.



8. Disconnect the connectors behind the box.





9. Remove the trim panel on the box with your hands.



10. Disconnect the connectors at the back of the trim panel.



11. Remove two screwdrivers inside the trim panel.



12. Take another box under the radio with your hands.



13. Disconnect all the connectors at the back of the box.



14. Remove two screws after taking away the box with a screwdriver.



15. Pop out the disc player.



16. Remove the screws at both sides of the disc player.



17. Take the disc player out of the dashboard.



18. Remove two screws holding the radio with a screwdriver.



19. Take the radio out of the dashboard.



20. Disconnect all the connectors at the back of the radio.



21. Check all the accessories for the new Seicane car radio.
22. Connect the harnesses to the back of the new Seicane car radio.
23. Connect the Seicane car radio to your original car radio 's plugs.
24. Put the new Seicane unit into the dashboard and turn it on to have a comprehensive check.
25. If everything works well, then install all the screws, boxes and trim panels accordingly into their original places. If not, check carefully whether all the cables are connected or not.

**Please note:**

We suggest you arrange a professional to install it. If you have any questions about installation, please send us photos about your original car's plugs, we can make a wiring diagram for your car.