



08:03

same, the actual functionality prevail.

⚠ Warning

To ensure that you and your car and personal safety of others, please be sure to do the following basic requirements:

- ① Before using this unit, please read all instructions carefully. Follow the instructions as if caused by the machine along the sea, it will void the warranty.
- ② to ensure traffic safety and to avoid violation of traffic regulations, do not watch the program and operate the unit while driving.
- ③ To avoid short circuit, do not allow the unit in contact with rainwater.
- ④ To prevent a short circuit, do not prevent or leave any metallic objects (such as coins or metal tools) inside the device.
- ⑤ Click here for manual use the machine, the machine can not open their own repairs, for repair, please professional repair station maintenance.
- ⑥ when the engine is turned off, do not use the car stereo for a long time, otherwise it will run out of battery power.
- ⑦ Never insert objects into the ventilation slots or other openings of the device.
- ⑧ Do not use sharp objects come into contact, rub or strike the screen.



08:03

Enable / disable host

Power

When the ignition switch is in the ACC ON position, press the switch panel on the touchscreen 【⏻】 key to boot.

off



after the host starts, press the switch on the side of the touch screen 【⏻】 button for 2 seconds, the host will perform the shutdown.

main interface

in the boot mode, the system defaults to enter the radio interface, touch 【🏠】 icon to enter the main interface:




① fingers gently sliding around the screen to switch the main community page,

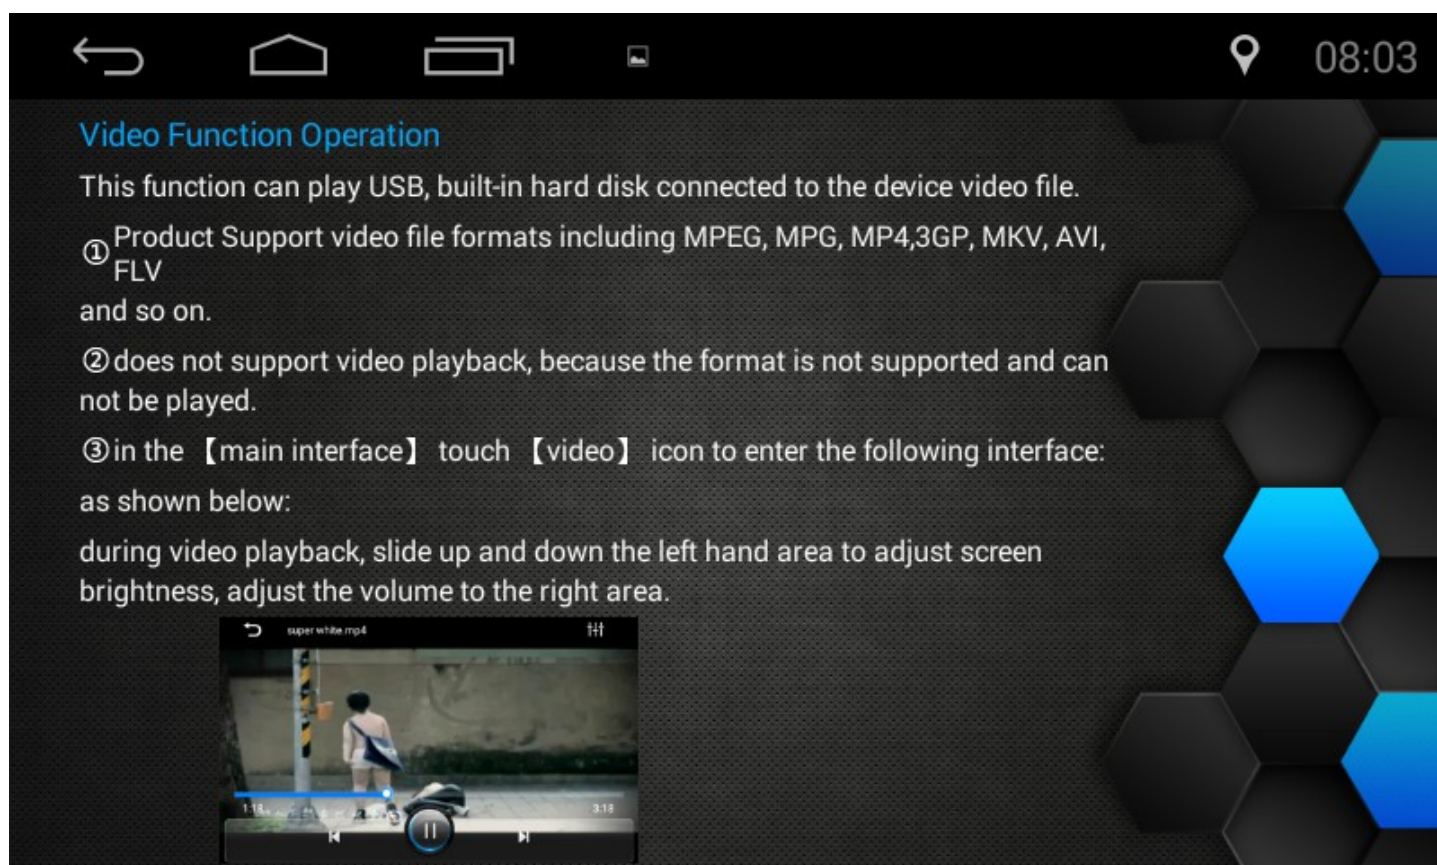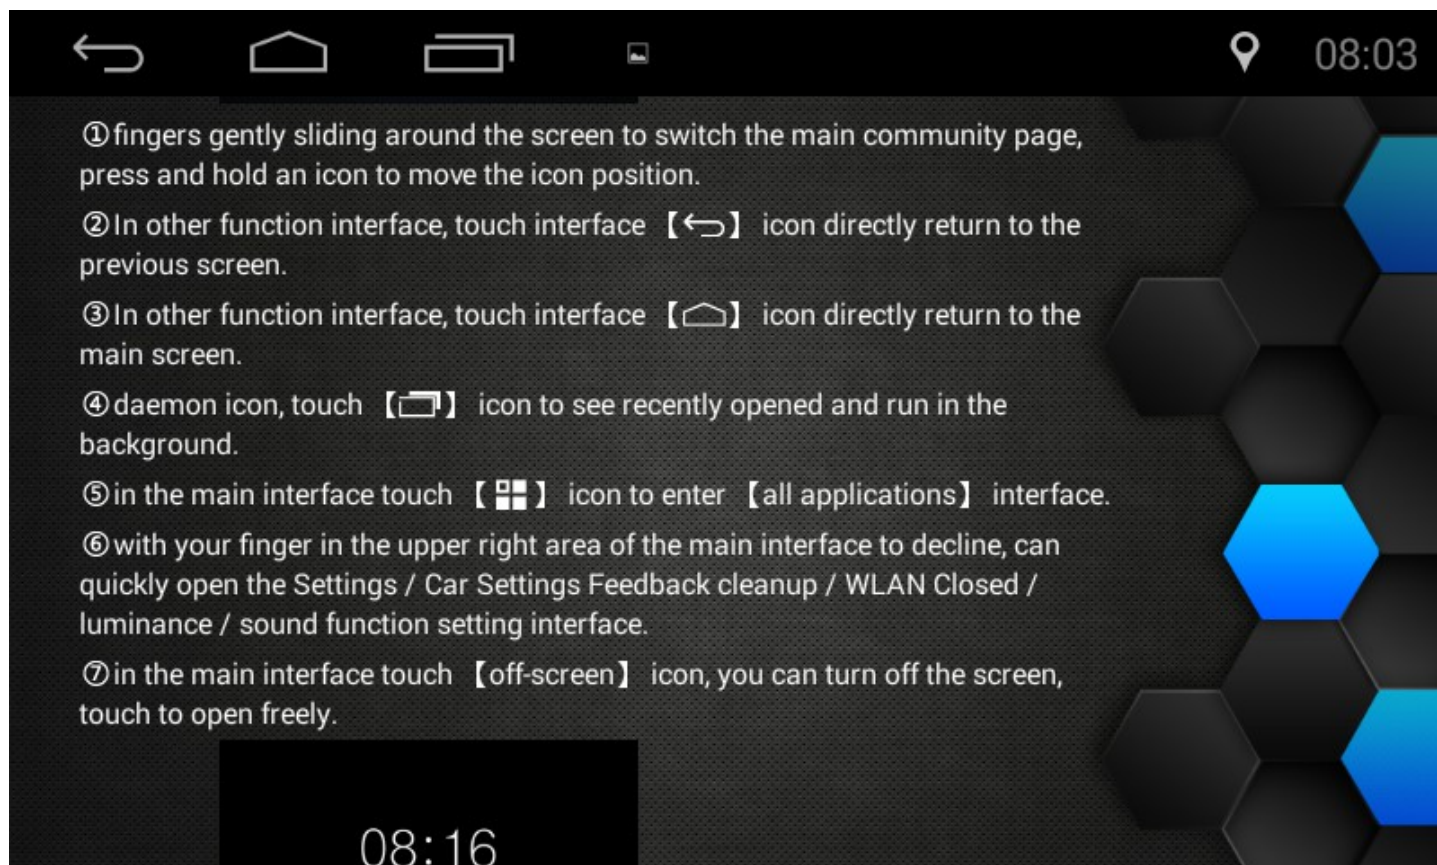

← Home Recent Apps 08:04

mobile phone network operator function

This feature is the use of the smart phone's USB data interface, via VNC technology and mobile phone screen image to display a host vehicle to achieve reverse control functionality through the Android ADB technical Audio transmission Bluetooth A2DP technology. In the 【main interface】 touch 【Internet phone】 icon to enter the following interface:



① USB debugging turned on your phone:
end Android phone to enter 【Settings】 → 【Developer options】 → 【Open Developer options】 → Select 【USB debugging】 and OK.


② Link USB cable:
After the host USB cable Android phone link, at 【phone network】 interface touch 【Detection Android phones】 , the phone automatically pop up 【Allow USB

← Home Recent Apps 08:04

② Link USB cable:



After the host USB cable Android phone link, at 【phone network】 interface touch 【Detection Android phones】 , the phone automatically pop up 【Allow USB debugging】 prompt box, check the Always allowPC is determined to link (mobile phone connection for the first time, a long time, because you want to install a service and APP, please be patient), tap the phone connection patterns may enter USBLINK guide help screen.



connection is installed successfully ejected Even billion applications. Click Install to enter the mobile Internet interface:



Touch 【dual Interactive】 icon: You can switch the phone main interface / Even billion interface.

Touch 【mobile video】 icon: the phone can play video files.

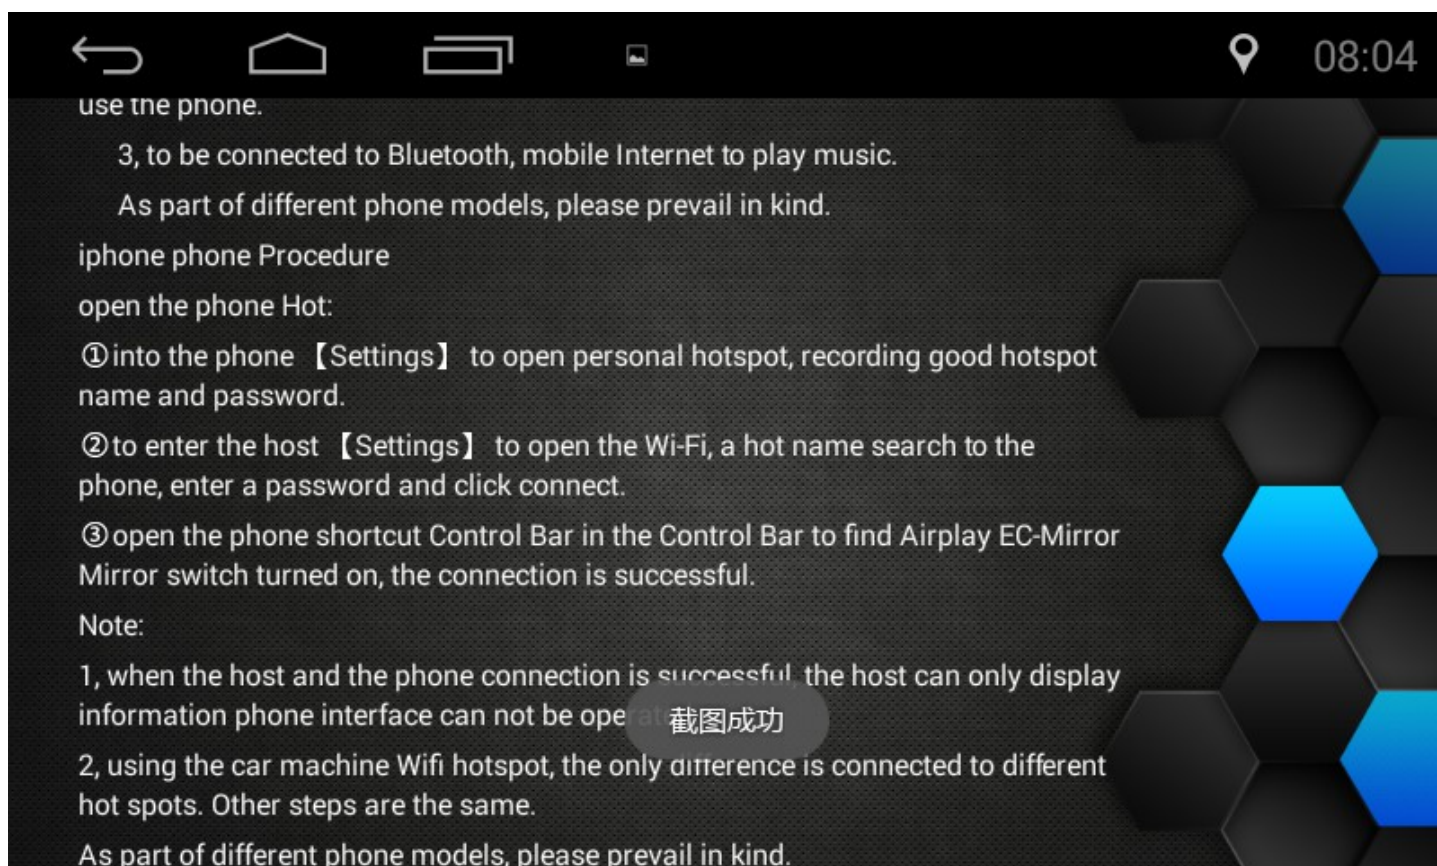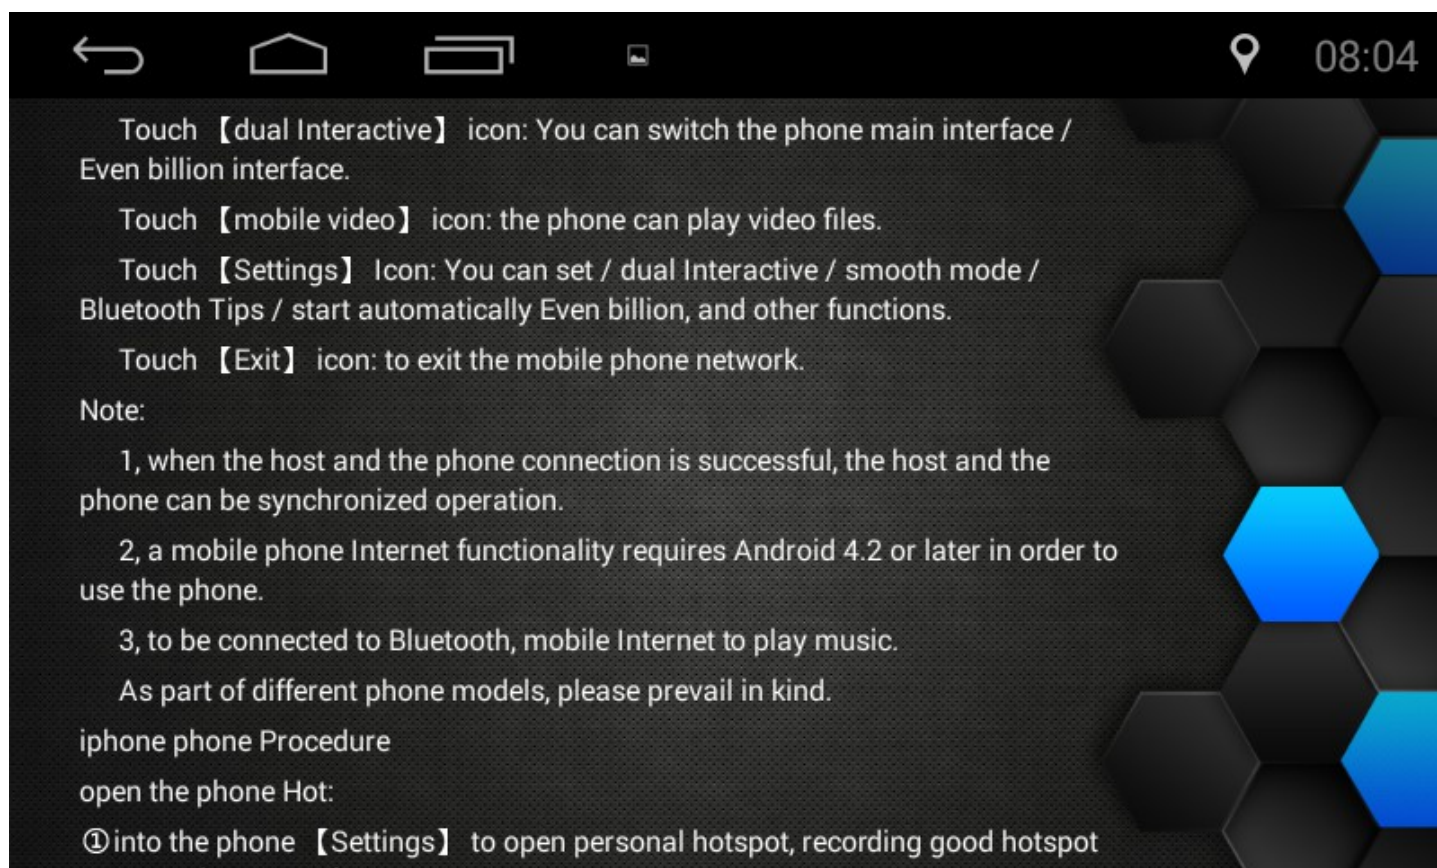

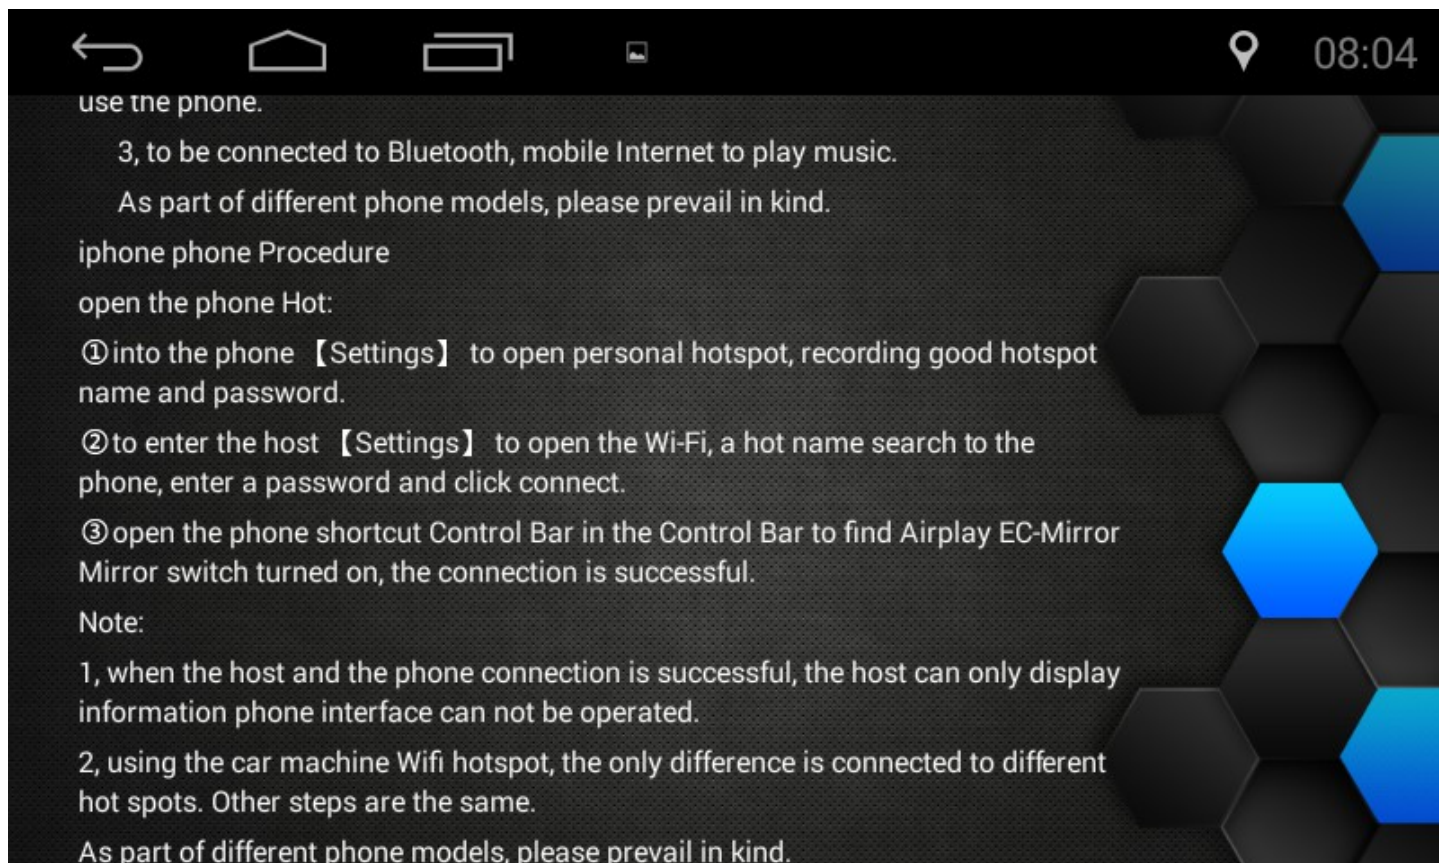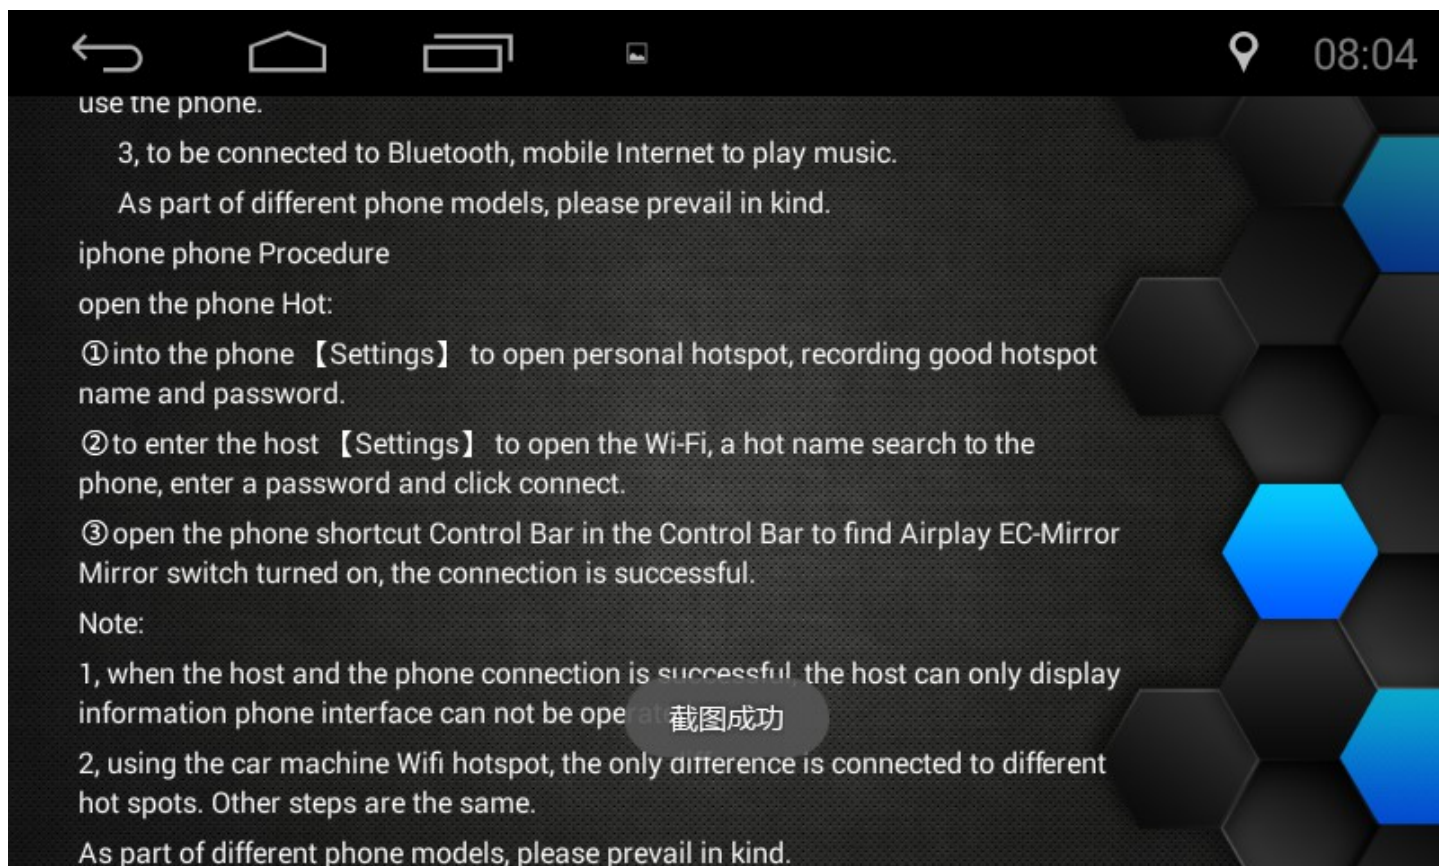


← ⌂ ☰ 🖼️ 📍 08:05

Boot Logo functional operation (optional)

in 【all applications】 interface touch 【Start Logo】 icon to enter the power setting interface Logo: Click below the screen (set the boot Logo) button to enter the Boot Logo setting.




Note: Only the full screen size of BMP files can set the boot Logo, the number of colors and BMP color depth of 32 before they can, BMP files need to be placed in an external storage device boot_logo directory below.

reboot operation (optional)

touch 【all applications】 interface 【Restart】 icon to enter reboot the system interface: Touch OK to restart the system; reboot the system without touching the Cancel icon.

← ⌂ ☰ 🖼️ 📍 08:11


← ⌂ ☰ 🖼️ 📍 08:05



Note: Only the full screen size of BMP files can set the boot Logo, the number of colors and BMP color depth of 32 before they can, BMP files need to be placed in an external storage device boot_logo directory below.

reboot operation (optional)

touch 【all applications】 interface 【Restart】 icon to enter reboot the system interface: Touch OK to restart the system; reboot the system without touching the Cancel icon.




← ⌂ ☰ 🖼️ 📍 08:11

← ⌂ ☰ 📷 08:05

telephony features


in the 【main interface】 touch 【Phone】 icon to enter the following interface:



pair and connect

- ① when the phone is paired with the host for the first time, shall look at the steps:
Open the phone's Bluetooth feature.
- ② search by mobile Bluetooth device or search for Bluetooth devices through the host, and connect.
- ③ is displayed on the phone's screen a message, enter the password (0000) on your phone, then press (ENT).
- ④ is displayed on the phone's screen a message, enter the password (0000) on your phone, then press (ENT).

← ⌂ ☰ 📷 08:06



⑤ After pairing, to enter the following interface: Bluetooth system after re-energized, it will automatically connect to the last phone disconnected. After successful pairing, the connection state upper right corner 【📞】 icon is white, otherwise, the connection status 【📞】

☎ must open the phone's Let all nearby Bluetooth devices to detect feature, you can search for hosts to mobile devices.

🕒 Call History 📞 Phonebook ☰ dial




📄 search for Bluetooth devices ⚙ Bluetooth Settings


dial





When the phone is connected to the host is successful, enter the phone number via the keypad on the touch screen, then touch 【📞】 icon to make a call. In the dial up process, if input wrong number, touch 【📞】 icon, delete by single digit.

← Home Recent Apps Location 08:06

dial

When the phone is connected to the host is successful, enter the phone number via the keypad on the touch screen, then touch 【】 icon to make a call. In the dial-up process, if input wrong number, touch 【】 icon deletes by single digits, press 【】 icon to delete all. The following interface:





- ① Touch 【】 icon to display a numeric keypad, touch again in a call to exit the numeric keypad.
- ② Touch 【】 icon to hang up the phone.
- ③ Touch 【】 icon audio call to switch to the handset with the car stereo unit.
- ④ Touch 【】 icon, you can switch silent mode.

☞ You can also hang up directly from your phone.


← Home Recent Apps Location 08:06


Phonebook


Touch Bluetooth interface 【】 icon to enter the phone book as follows interface:



Call History

Touch Bluetooth interface 【】 icon to enter the following interface:



④ Touch the bottom-right corner 【】 icon to switch outgoing / missed /

← 🏠 📁 🖼️ 08:07

Call History

Touch Bluetooth interface 【🕒】 icon to enter the following interface:



① Touch the bottom right corner 【📞】 icon to switch outgoing / missed / incoming calls display interface.

Note: After the connection is successful, the phone sends a request message (BC8-Andrroid wish to access your contacts and call history you want to grant access BC8-Andrroid.ask Privileges?) And press 【Enter】 on your phone, enter the phone book download, the download is successful, the phone call records and phone book will be displayed in real time to the host call records and phone book. (As part of the host Bluetooth device name is not the same, please Shall prevail in kind)

touch Bluetooth interface 【⚙️】 icon to enter the following interface:

← 🏠 📁 🖼️ 08:07


incoming calls display interface.


Note: After the connection is successful, the phone sends a request message (BC8-Andrroid wish to access your contacts and call history you want to grant access BC8-Andrroid.ask Privileges?) And press 【Enter】 on your phone, enter the phone book download, the download is successful, the phone call records and phone book will be displayed in real time to the host call records and phone book. (As part of the host Bluetooth device name is not the same, please Shall prevail in kind)

touch Bluetooth interface 【⚙️】 icon to enter the following interface:

② Touch 【Device Name / PIN code】 pop-up numeric keypad, you will need to modify the device name / PIN code


③ Touch 【🔍】 icon to set the 【Automatic / Auto Answer】 function switch.



08:07


wallpaper functional operation


in the 【main interface】 touch 【wallpaper】 icon to enter the following interface, you can select your favorite wallpaper in the background and drag the wallpaper can browse, then press 【Set wallpaper】 icon set success.



dynamic wallpaper function Operation

in 【all applications】 interface touch 【Live Wallpaper】 icon to enter the following interface, choose your favorite live wallpaper, drag up and down to browse, then press 【Set wallpaper】 icon set Set success.

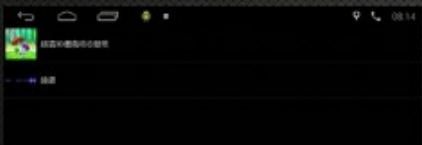

08:07

cleaning equipment

If the surface of the device has a stain, use a clean, soft cloth to remove spots, such as cleaning cloth.


If the panel is very powerful dirty, wipe with a mild detergent dirt, then use a clean, soft cloth to wipe off the cleaner.

⚠ mechanical parts cleaning spray may affect the device directly on the device. Hard cloth or using a volatile liquid (such as thinner or alcohol) to wipe the surface this may scratch the surface or erase character.

← ⌂ ☰ 📷 08:08

radio operation

in the 【main interface】 touch 【Radio】 icon to enter the radio interface:



The screenshot shows a radio interface with a frequency display of 87.50 MHz. Above the display is a signal strength indicator. Below the display are buttons for previous and next station, and a list of preset frequencies: 87.50 MHz, 90.00 MHz, 98.00 MHz, 106.50 MHz, 108.00 MHz, and 87.50 MHz. At the bottom are buttons for BAND, search, fine-tune, and settings.

Band switching

Touch 【BAND】 icon to switch between FM1 / FM2 / FM3 / AM1 / AM2.

fine-tune search

press 【>>】 and 【<<】 icon trimming point by point, long press the manual search, when the search to the radio will automatically stop.

automatic search storage radio stations

① Long press 【🔍】 again icon to automatically enter the search state to search stations automatically stored. Touch the search process 【🔍】 icon to terminate the automatic search for a station.

← ⌂ ☰ 📷 08:08

BAND 🔍 🎚 ⚙

Band switching

Touch 【BAND】 icon to switch between FM1 / FM2 / FM3 / AM1 / AM2.

fine-tune search

press 【>>】 and 【<<】 icon trimming point by point, long press the manual search, when the search to the radio will automatically stop.

automatic search storage radio stations

① Long press 【🔍】 again icon to automatically enter the search state to search stations automatically stored. Touch the search process 【🔍】 icon to terminate the automatic search for a station.

💬 ① FM band can store 18 radio stations (FM1 FM2 FM3 each 6), AM band can store 12 radio stations (AM1 AM2 each 6)

② search, search again after the search will stop automatically.

Settings

Touch 【⚙】 icon, the pop-up interface, touch 【🔌】 icon to set ST / LOC function switch



08:08

Bluetooth music function operation

Bluetooth music function, namely through the audio device to play wireless music files in your phone, provided that this mobile phone must be able to support the corresponding Bluetooth protocol. When the Bluetooth device is connected to the machine After the audio system automatically connect to a paired phone. In the 【main interface】 Touch 【Bluetooth music】 icon to enter the following interface:



Because of different phone models and in some cases should start to play audio files through the phone keypad.







08:08




Panel Key Functions

Please refer to the physical panels, inquiries about the corresponding key introduction. (Part Function Keys If deviation, please prevail in kind)

1. (switch / Mute)

In the absence of state power, short press to start the host.

① with panel  key case, according to this side of  key is no mute function in the boot state, long press the side of the  key is off the host, press the panel  key to switch to silent mode.

② no panel  down key scene in the boot mode, press the panel  key to switch to silent mode, press  key to turn off the host.

2. (main menu)



In any application, press to return to the main screen.

3. (Back key)

In any application, press to return to the previous menu.

4. + (volume up)

In any mode, press the volume up

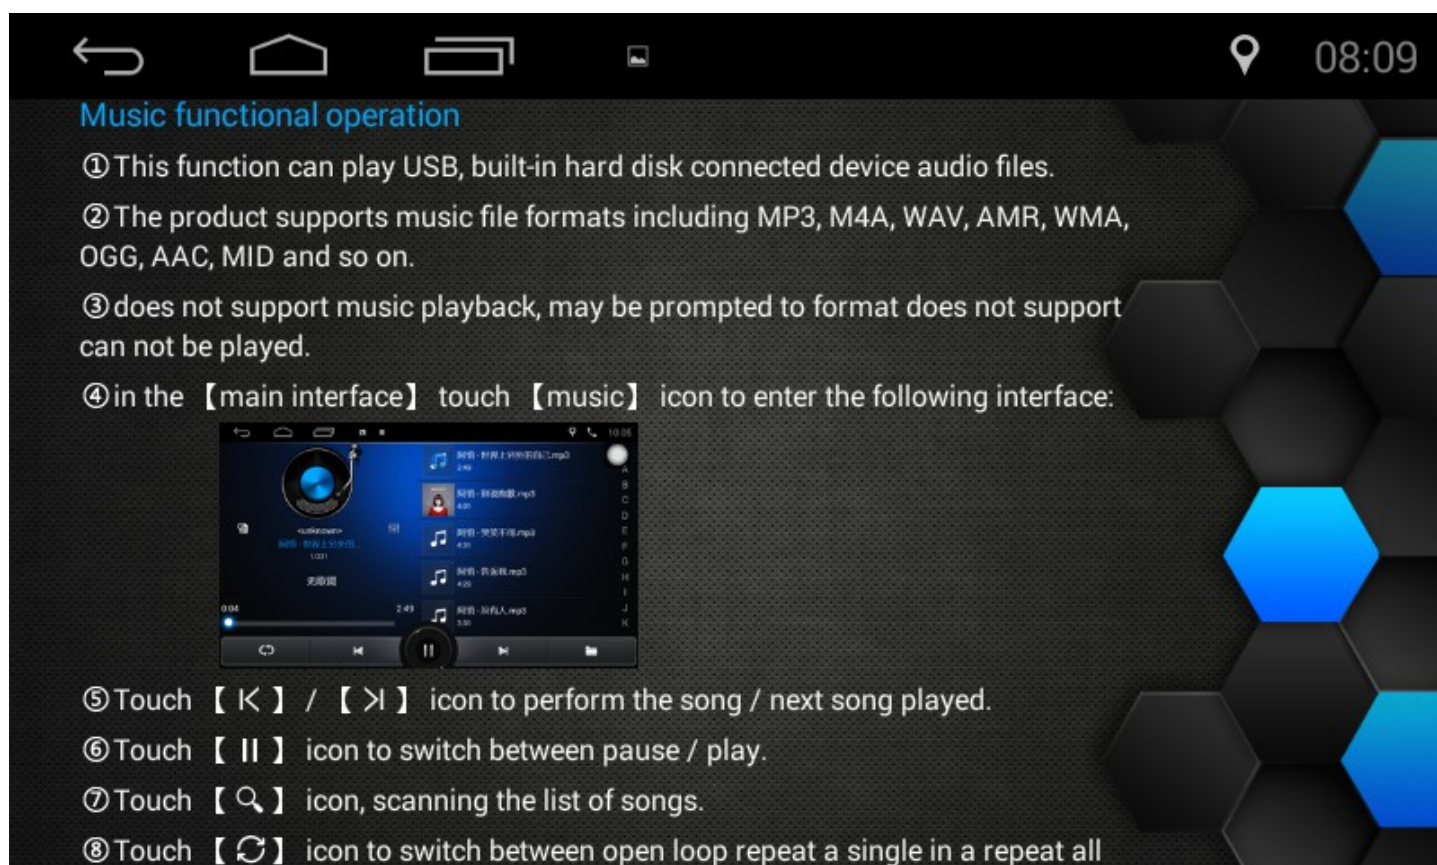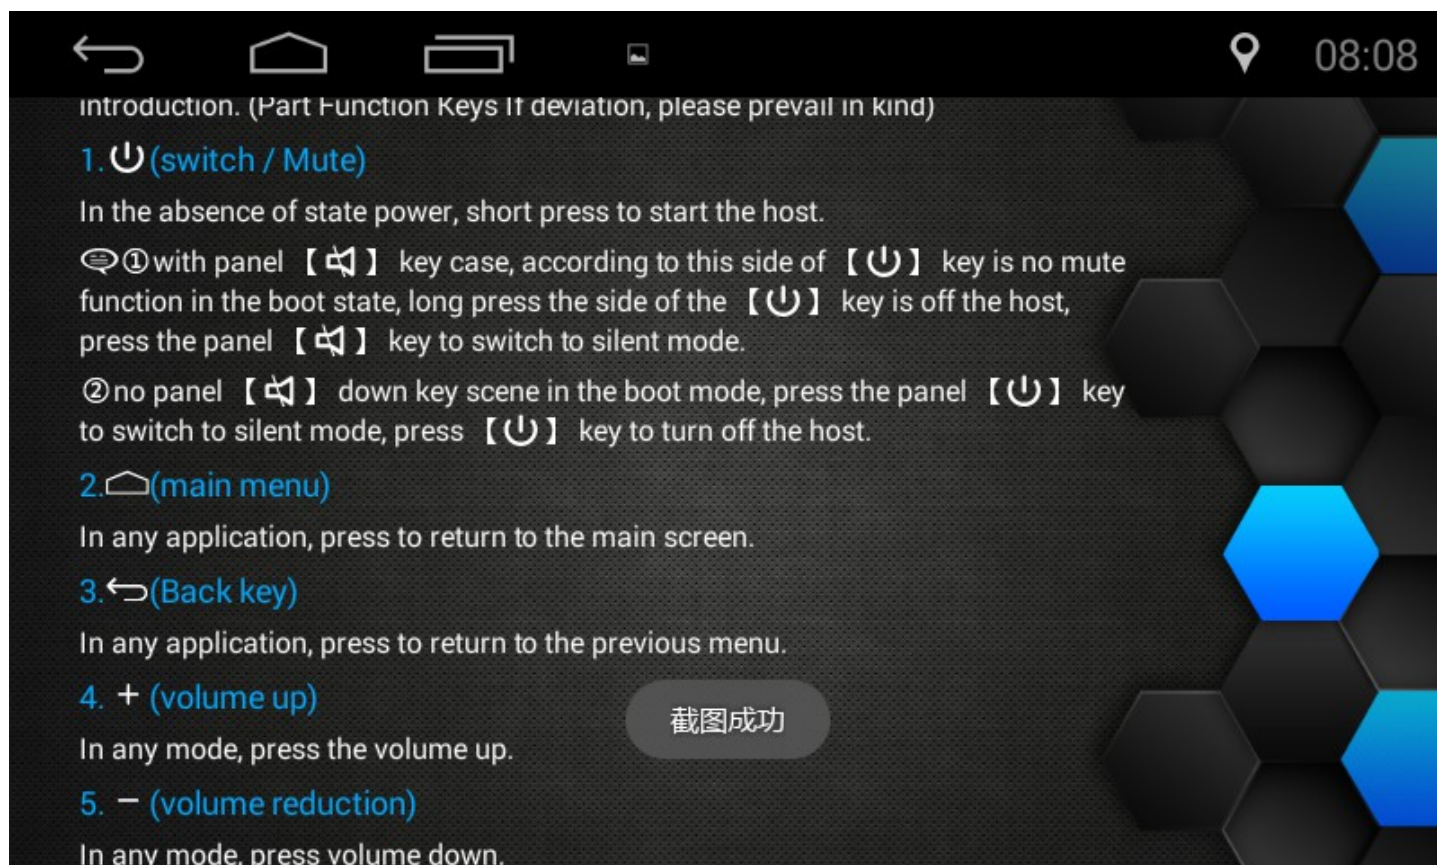



08:09

Figure quick browsing operation

This function can be USB, internal hard disk connected to your device for viewing image editing.

① The product supports image file formats including JPG, PNG, BMP, JPEG and the like.

② Unsupported image format player, because the format is not supported and can not be played.

③ in 【all applications】 interface touch 【Express plans】 icon to enter the following interface:



④ touch the top of the 【📁】 icon to select the album / activities and other options.



08:09



④ touch the top of the 【📁】 icon to select the album / activities and other options.

⑤ Touch 【📁】 icon to set the lamination / Grid / List / file browsing albums effects.

⑥ Touch 【⋮】 icon to set the sort / Add / show hidden items and other options.



Note:

1, touch 【⋮】 icon, click 【Settings】 - 【General】 - Select 【contains video files】 , you can play video files; when there is no check on 【contains video files】 , video files, unable to display.

2, part of the picture can not edit text Rotate Left or Rotate Right, so it will not display this function icons.



08:09

SET FUNCTION OPERATION

in 【all applications】 interface touch 【Settings】 icon to enter the following interface:



WLAN Settings

opening and closing WLAN

Touch 【WLAN】 next to the button to open the WLAN, WLAN open later, if you are surrounded by WLAN network in the list on the right column will be searched. The following interface:



08:10

WLAN Settings

opening and closing WLAN

Touch 【WLAN】 next to the button to open the WLAN, WLAN open later, if you are surrounded by WLAN network in the list on the right column will be searched. The following interface:



the figure above, to search for the source name (on the router, this name is called the SSID, they can be set, is generally not recommended set to Chinese) small print below plus wireless WLAN Tight manner, each network behind the fan icon indicates the WLAN signal strength, if the fan next to the network name added a small lock indicating signal is encrypted, you need to enter a password before they can connect.

截图成功

Connectivity Wireless WLAN

opening and closing WLAN

The screenshot shows the Windows Settings application with the 'Network & Internet' section selected. The 'Wi-Fi' toggle is turned on. A list of Wi-Fi networks is displayed, including 'Nomoda', 'carl', 'cmico-7468', 'Xiaomi_MMD-2', and 'Kimon'. The 'Kimon' network is currently selected, indicated by a blue bar on the left. The status for each network is shown on the right: 'Nomoda' and 'carl' are 'Protected' (通过 WPA/WPA2 进行保护), 'cmico-7468' is 'Protected' (通过 WPA/WPA2 进行保护), 'Xiaomi_MMD-2' is 'Protected' (通过 WPA2 进行保护), and 'Kimon' is 'Not Protected' (不在范围内).

Connectivity Wireless WLAN

Search to wireless WLAN if not encrypted, it will automatically connect after open WLAN.

Check the lower-left corner of the Show advanced options later, there will be more detailed settings, when connecting this function can be selected according to their needs:

Proxy: Default None (no access to general, will not be here, say so).

IP settings: The default is DHCP, automatically obtain IP address. When elected as static, you can manually enter the IP address.

can query traffic usage and other functions.

截图成功

Tethering portable hotspot: Touch **【Setup】** icon WLAN hotspot, enter the


← Home Recent Apps 08:10

Data usage

can query traffic usage and other functions.


More Settings

Tethering portable hotspot: Touch **【Setup】** icon WLAN hotspot, enter the following interface:




to modify the network SSID / security / password, touch **【Save】** to set success.

Mobile Network: can be set to enable data network, mobile data network roaming capabilities and other options; touch **【mobile network】** icon to enter the following interface:



← Home Recent Apps 08:10




Touch **【Network Mode】** icon to enter the preferred network mode interface, when opening Use only 2G networks, 3G high-speed Internet access is automatically switched off, then the network speed of the system will be reduced Please set according to the actual situation.

Language input


Settings page in touch **【Language input】** icon to enter the following interface:

- ① Language Settings page includes selecting a language, keyboard and input method settings.
- ② product interface language support for Chinese, traditional Chinese and English.
- ③ Touch **【iFlyTek input method】** icon to the right, you can set the input settings, keyboard settings, set up voice, handwriting settings, restore the default settings,




Date and time settings

set interface touch 【Date and Time】 icon to enter the following interface; you need to set the date, time, time zone, in the corresponding interface in touch 【completed】 icon to set Set success.




version number information

Settings page in touch (on vehicle computer) icon, you can view the Android



Date and time settings

set interface touch 【Date and Time】 icon to enter the following interface; you need to set the date, time, time zone, in the corresponding interface in touch 【completed】 icon to set Set success.



version number information

Settings page in touch (on vehicle computer) icon, you can view the Android version / revision number.